

LED controller



+



24V DC Power Supply

Typical Uses



INSS



OI100



IngroundLite



SHP330/660

RAY DRIVER

► FEATURES

- External 24V provides constant current supply for 1W or 3W LED units
- 12 Position DIP switches for DMX/built in function modes
- DMX input and DMX output with 12 built in programs in stand alone mode
- Simple and economical solution for high efficiency LED lighting systems
- Used with PSU-24-3.25A-00 24V power supply


► SPECIFICATION

DC input :	DC 24V
Data input :	DMX 512 of 3-pin XLR socket
Data Output :	DMX data out of 3-pin XLR socket
Power and Data Output :	6 Pin Terminal and RJ-45 connections
Housing:	Sheet metal with powder painting IP20
Weight:	0.28Kg
Dimension:	104(L) x 97(W) x 25(H)mm

► ORDER NUMBERS

Part No.	Description
PSU-24V-6.5A-00	Switching power supply : DC24V, 6.5Amax
RD350-1W-3Ch-24V	Constant current Driver for 1W LEDs with DMX
RD700-3W-3Ch-24V	Constant current Driver for 3W LEDs with DMX

► PHYSICAL DIMENSIONS

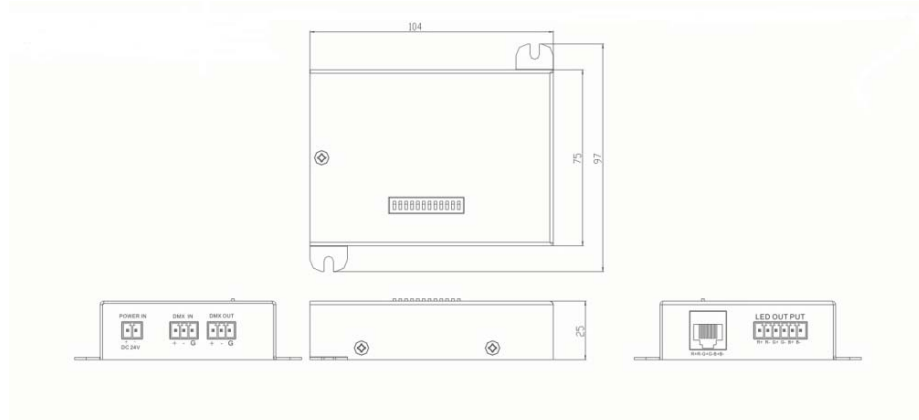

** All rights reserved. Improvement and changes to specifications, design and all contents in this catalog, may be made at any time without prior notice.